



VANJAX UNIT -1 (VXC-1)

VANJAX

ISO 9001:2008 COMPANY

Estd. 1981


VANJAX FACTORY UNIT -2 (VXC-2)

INDUSTRIAL HYDRAULICS - TOOLS - EQUIPMENT - DEVICES - MACHINES

VANJAX MATERIAL HANDLING EQUIPMENT


VANJAX SALES PVT. LTD.,
 an ISO 9001:2008 COMPANY

Phone: 044-4282 1000, 2625 5300

Fax: 0091-44-4598 5700

 e-Mail: info@vanjax.com / cgm@vanjax.com / salesndl@vanjax.com / salesblr@vanjax.com / website: www.vanjax.in

 Regd. Off. Unit-1 (VXC-1)
 343, Sidco Industrial Estate
 Ambattur

Chennai 600098.T.N., India

 Vanjax Factory Unit-2 (VXC-2)
 S.No.230/11, Mevalur Kupam
 Sriperumbudur

Chennai 602105. T.N., India

 Vanjax Regional Mktg. Off.
 A-53, Ground Floor
 Okhla Indl. Area, Phase II
 New Delhi 110020. India

 Vanjax Branch Off.
 Narang Chambers
 15, 3rd Floor, N.R.Road
 Bengaluru 560002. India

 ENTREPRENEUR
 OF THE YEAR
 SME - 2012


 BANK OF INDIA
 SPONSORED SURVEY OF
 100 BEST SME - 2012

HYDRAULIC POWER IN ACTION ★ YOU NEED IT, VANJAX MAKES IT.

HYDRAULIC PALLET TRUCK



VANJAX SALES PVT. LTD.,
an ISO 9001:2008 COMPANY

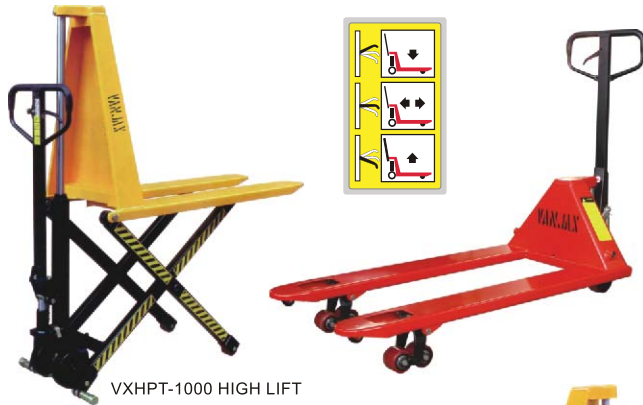

VXHPT-1000 HIGH LIFT



VXHPTSE-1000 HIGH LIFT



VXHPTSE-20-WOP- WITHOUT PLATFORM

TYPE (MANUAL)	VXHPT-2500PU	VXHPT-3000PU	VXHPT-3500PU	VXHPT-1000 HL
CAPACITY	2500 kgs	3000 kgs	3500 kgs	1000 kgs
WIDTH OF FORKS	160 mm	160 mm	160 mm	150 mm
WIDTH BETWEEN FORKS	220 / 365mm	230 mm	230 mm	260 mm
OVERALL FORK WIDTH	540 / 685mm	550 mm	550 mm	560 mm
OVERALL LENGTH	1490 mm	1550 mm	1550 mm	1490 mm
FORK LENGTH	1100 mm	1150 mm	1150 mm	1190 mm
MIN. HEIGHT OF FORKS	90 mm	85 mm	85 mm	85 ± 2 mm
MAX. HEIGHT OF FORKS	200 mm	200 mm	195 mm	800 mm
NET WEIGHT (approx.)	72 kgs	73 kgs	86 kgs	128 kgs

* Also available S.S. Pallet Truck 2 Ton. Cap. & 2 Ton. Cap. with weighing scale.
Also available with Nylon / Cast-Iron wheels.

TYPE (SEMI-ELECTRIC)	VXHPTSE- 1300	VXHPTSE- 1000 HL
CAPACITY	1300 kgs	1000 kgs
WIDTH OF FORKS	160 mm	150 / 160 mm
OVERALL FORK WIDTH	540 mm	560 mm
OVERALL LENGTH	1635 mm	1490
FORK LENGTH	1150 mm	1190 mm
MIN. HEIGHT OF FORKS	85 / 75 mm	85 ± 2 mm
MAX. HEIGHT OF FORKS	120 mm	800 mm
BATTERY VOLTAGE, NORMAL CAP.	2 x 12 V / Ah	70 / 12 Ah / V
NET WEIGHT (approx.) Including Battery	155 / 165 kgs	159 kgs without Battery

TYPE (FULLY ELECTRIC)	VXHPTSE-1.5 W	VXHPTSE-20-WOP
CAPACITY	1500 kgs	2000 kgs
FORK, LOWERED HEIGHT	85 mm	85 mm
OVERALL LENGTH	1600 mm	1865 x 1935 mm
OVERALL WIDTH	560 mm	730 mm
aisle width for pallets-crossways	1779 mm	1856 mm
aisle width for pallets-lengthways	1929 mm	2069 mm
TRAVEL SPEED LOAD / WITHOUT LOAD	3.5 / 4 km/h	7.5 / 8.5 km/h
BATTERY VOLTAGE, NORMAL CAP.	24 v / 60 Ah	24 v / 210 Ah
NET WEIGHT (INCLUDING BATTERY)	225 kgs(approx)	645 kgs (approx)

TYPE (MANUAL)	VXHS - 1000 /1500	VXHS - 1000 /3000	VXHS - 2000 /1600
CAPACITY	1000 kgs	1000 kgs	2000 kgs
LIFTING HEIGHT	1500 mm	3000 mm	1600 mm
CLOSED HEIGHT	81 mm	80 mm	80 mm
FORK LENGTH	930 mm	900 mm	1000 mm
FORK WIDTH	150 mm	140 mm	300-820 mm
LOAD CENTRE	400 mm	450 mm	400 mm
OVERALL (L x W x H)	1410x780x1965 mm	1500x800x2060 mm	1500x865x2100 mm
NET WEIGHT	120 kgs	330 kgs	285 kgs

TYPE (SEMI-ELECTRIC)	VXHSE-1500/2000	VXHSE-2000/2000	VXHSE-1000/2000
CAPACITY	1500 kgs	2000 kgs	1000 kgs
LIFTING HEIGHT	2000 mm	2000 mm	2000 mm
CLOSED HEIGHT	90 mm	90 mm	90 mm
FORK LENGTH x WIDTH	1000 x300-850mm	1000 x300-850mm	1000 x300-850mm
LOAD CENTRE	400 mm	400 mm	400 mm
MIN. TURNING RADIUS	1350 mm	1350 mm	1350 mm
LIFTING MOTOR	12 / 1.5-1.6 kw	12 / 1.5-1.6 kw	12 / 1.5-1.6 kw
BATTERY	12 v / 15 A	12 v / 15 A	12 v / 15 A
OVERALL (L x W x H)	1660x865x1580mm	1660x865x1580mm	1660x865x1580mm
NET WEIGHT	448 kgs	460 kgs	424 kgs

HYDRAULIC STACKER



Also available
VXHSE-1500/2500
VXHSE-1500/3000
VXHSE-1500/3500
VXHSE-1000/3000
VXHSE-1000/3500

HYDRAULIC STACKER



VANJAX SALES PVT. LTD.,
an ISO 9001:2008 COMPANY



TYPE (FULLY ELECTRIC)	VXHS- 1000 / 2500 FE	VXHS- 1500 / 2500 FE
CAPACITY	: 1000 kgs	: 1500 kgs
LIFTING HEIGHT	: 2500 mm	: 2500 mm
HANDLE HEIGHT	: 1385 - 1405 mm	: 1385 - 1405 mm
FORK LENGTH x WIDTH	: 1125 mm x 570 mm	: 1125 mm x 570 mm
LOAD CENTRE	: 500 mm	: 400 mm
MIN. TURNING RADIUS	: 1700 mm	: 1750 mm
DRIVING, LIFTING MOTOR	: 24v/2.4 kw, 24v/2-3 kw	: 24v/2.4 kw, 24v/2-3 kw
BATTERY	: 24 v / 240 - 270 Ah	: 24 v / 240 - 270 Ah
OVERALL (L x W x H)	: 2040 x 856 x 1770 mm	: 2040 x 856 x 1770 mm
NET WEIGHT (approx.)	: 858 kgs	: 888 kgs

Also available
VXHS-1000/3000 FE
VXHS-1000/3500 FE
VXHS-1500/3000 FE
VXHS-1500/3500 FE
VXHS-2000/2500 FE

HYDRAULIC BARREL LIFTER & TILTER

TYPE	: VXHBLT - 350
RATED CAPACITY	: 350kgs
LIFTING HEIGHT	: 1425 mm
OVERALL LENGTH	: 1190 mm
OVERALL WIDTH	: 890 mm
OVERALL HEIGHT	: 2020 mm
NET WEIGHT (approx.)	: 155 kgs



Also available



DRUM LIFTER ATTACHMENT
Cap. -250 kgs.

HYDRAULIC DRUM HANDLER



DRUM HANDLER CUM LOADER - VXDH/L-300

TYPE	VXDH-250	VXDH/L-300
LIFTING CAPACITY	: 250 kgs	: 300 kgs
LIFTING HEIGHT	: 280 mm	: 900 mm
MAXIMUM DRUM DIAMETER	: 572 mm	: 572 mm
MAXIMUM DRUM LENGTH	: 915 mm	: 915 mm
NET WEIGHT (approx.)	: 40 kgs	: 120 kgs

HYDRAULIC SCISSOR TRUCK

TYPE	VXLT-500/880	VXLT-750/900	VXLT-800/1500	VXLT-1000/1300	VXLT-1000/1200
CAPACITY	: 500 kgs	: 750 kgs	: 800 kgs	: 1000 kgs	: 1000 kgs
MINIMUM HEIGHT	: 285 mm	: 420 mm	: 445 mm	: 300 mm	: 425 mm
MAXIMUM HEIGHT	: 880 mm	: 900 mm	: 1500 mm	: 1300 mm	: 1225 mm
PLATFORM SIZE (mm)	: 850x500x50	: 1000x510x55	: 1220x610 mm	: 2035x750 mm	: 1200x800 mm
MODE OF OPERATION	: FOOT PEDAL	: FOOT PEDAL	: FOOT PEDAL	: FOOT PEDAL	: FOOT PEDAL
MOVEMENT	: MANUAL	: MANUAL	: MANUAL	: MANUAL	: MANUAL
SAFETY FEATURE	: MECH. LOCK Wheel Brake	: MECH. LOCK Wheel Brake	: MECH. LOCK Wheel Brake	: MECH. LOCK Wheel Brake	: MECH. LOCK Wheel Brake
NET WEIGHT (approx.)	: 81 kgs.	: 120 kgs.	: 195 kgs.	: 198 kgs.	: 163 kgs.

TYPE (WITH ROLLERS)	: VXLT - 2500
CAPACITY	: 2500 kgs
MINIMUM HEIGHT	: 500 mm
MAXIMUM HEIGHT	: 1700 mm
PLATFORM SIZE (mm)	: 2000 x 2600
BAZE FRAME SIZE	: 1900 x 2510
LIFT SPEED	: 60 ~ 70 sec
POWER PACK	: 380v / 50 hz, AC 2.2 kw
NET WEIGHT (approx.)	: 1700 kgs.



Design / Dimensions are subject to change for sake of progressive improvement.
Warrantee / Guarantee upto one year from the date of purchase.

HYDRAULIC DOCK LEVELER



TYPE (LIGHT DUTY)	VXFC - 31001	VXFC - 32001
CAPACITY	1000 kgs	2000 kgs
LENGTH	1550 mm	1740 mm
WIDTH	900 mm	950 mm
HEIGHT	1505 mm	1475 mm
NET WEIGHT (approx.)	84 kgs	96 kgs

CAP. IN KGS	LOAD IN KGS													
	W1	W2	W3	W4	E1	H	H1	H2	H3	H4	h1	h2	h3	h4
1000	1000	750	500	250	130	165	1790	1875	2000	2100	500	380	260	140
2000	2000	1500	1000	500	180	185	2020	2135	2265	2400	500	355	210	60

TYPE (HEAVY DUTY)	VXFC - 2000	VXFC - 3000	VXFC - 5000
CAPACITY	2000 kgs	3000 kgs	5000 kgs
LENGTH	2200 mm	2360 mm	3360 mm
WIDTH	1170 mm	1544 mm	1830 mm
HEIGHT	2060 mm	2060 mm	3700 mm

CAP. IN KGS	LOAD IN KGS													
	W1	W2	W3	W4	E1	H	H1	H2	H3	H4	h1	h2	h3	h4
2000	2000	1200	600	400	350	250	3100	3400	3700	4000	1020	880	740	600
3000	3000	1900	1000	700	350	325	3100	3400	3700	4000	1020	880	740	600
5000	5000	1400	700	575	400	430	4900	5300	5700	6100	1330	900	750	500

HYDRAULIC TAIL LIFT




TYPE	VXLT - with Rollers	VXLT - with Balls
CAPACITY	:	:
MINIMUM HEIGHT	:	:
MAXIMUM HEIGHT	:	:
PLATFORM SIZE (mm)	:	:
BAZE FRAME SIZE	:	:
LIFT SPEED	:	:
POWER PACK	:	:

CUSTOMER TO SPECIFY

TYPE	VXDL - 9	VXDL - 12
CAPACITY	9000 kgs	12000 kgs
PLATFORM SIZE	2500 x 2000 mm	2500 x 2000 mm
LIP BOARD WIDTH	450 mm	450 mm
TRAVEL	UP : 300 mm DOWN : 300 mm	UP : 300 mm DOWN : 300 mm
PIT SIZE - L x W x Depth (rear)	2700 x 2060 x 485 mm	2700 x 2060 x 600 mm
MOTOR	2 hp	2 hp
NET WEIGHT (approx.)	1100 kgs	1200 kgs

HYDRAULIC FLOOR CRANES

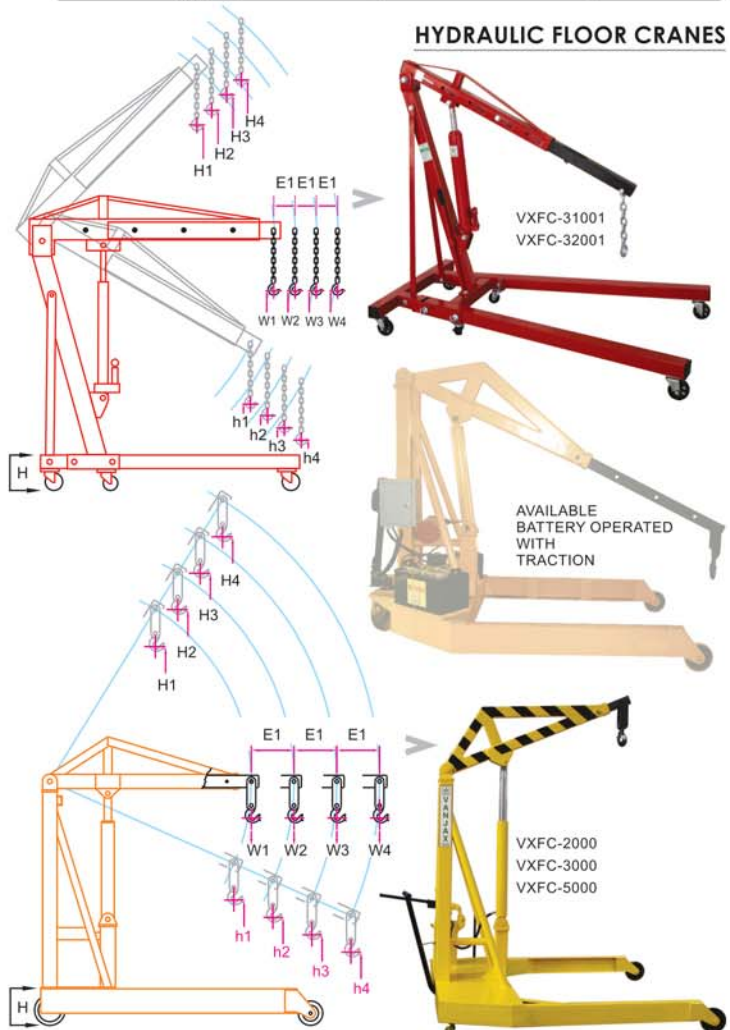

TYPE (Automatic Mechanical Tilting System)	VXHTL - 2000 / 1500 SP
CAPACITY	2000 kgs
HEIGHT	1550 mm
VOLTAGE	12 V / 24 DC
CENTRE OF THE GRAVITY OF THE LOAD	600 mm
STANDARD PLATFORM WIDTH	1800-2000-2300-2440 mm
STANDARD PLATFORM HEIGHT	1650-1800-2000 mm
NET WEIGHT (approx.)	530 kgs.

CUSTOMISED SCISSOR LIFTS WITH ROLLERS / BALLS AVAILABLE IN ALL CAPACITIES

