



# VANJAX



ISO 9001:2015 COMPANY

Estd. 1981



VANJAX UNIT -1 (VXC-1)

VANJAX FACTORY UNIT -2 (VXC-2)

**INDUSTRIAL HYDRAULICS - TOOLS - EQUIPMENT - DEVICES - MACHINES**

## VANJAX AERIAL ACCESS PLATFORMS



**VANJAX SALES PVT. LTD.,**  
 an ISO 9001:2015 COMPANY  
 Phone: 044-4282 1000, 2625 5300  
 Fax: 0091-44-4598 5700  
 e-Mail: info@vanjax.com / cgm@vanjax.com / salesndl@vanjax.com / salesblr@vanjax.com / website: [www.vanjax.in](http://www.vanjax.in)

Regd. Off. Unit-1 (VXC-1)  
 343, Sidco Industrial Estate  
 Ambattur  
 Chennai 600098. T.N., India

Vanjax Factory Unit-2 (VXC-2)  
 S.No.230/11, Mevalur Kuppam  
 Sriperumbudur  
 Chennai 602105. T.N., India

Vanjax Regional Mktg. Off.  
 A-53, Ground Floor  
 Okhla Indl. Area, Phase II  
 New Delhi 110020. India

**HYDRAULIC POWER IN ACTION ★ YOU NEED IT, VANJAX MAKES IT.**



ENTREPRENEUR  
 OF THE YEAR  
 SME - 2012

BANK OF INDIA  
 SPONSORED SURVEY OF  
 100 BEST SME - 2012

# VANJAX AERIAL ACCESS PLATFORM



## AERIAL ACCESS PLATFORM - TOWABLE



1

|                           |                          |
|---------------------------|--------------------------|
| TYPE ( ARTICULATED BOOM ) | : VXAPF - 200 / 18000 SP |
| PLATFORM CAPACITY         | : 200 kgs                |
| MAXIMUM PLATFORM HEIGHT   | : 18000 mm               |
| MAXIMUM OUTREACH          | : 8500 mm                |
| ROTATION                  | : 360° CONTINUOUS        |
| BASKET SIZE               | : 1120 x 720 x 1120 mm   |
| STABILIZER                | : 4 Nos                  |
| WEIGHT (approx)           | : —                      |

## AERIAL ACCESS PLATFORM - SELF PROPELLED / BATTERY OPERATED



|                           |                          |
|---------------------------|--------------------------|
| TYPE ( ARTICULATED BOOM ) | : VXAPF-SPV-BO 13X / 15X |
| CAPACITY                  | : 150 kgs                |
| MAXIMUM WORKING HEIGHT    | : 13000 mm / 15000 mm    |
| CLOSED HEIGHT FROM G.L.   | : 3200 mm                |
| MAXIMUM LIFT HEIGHT       | : 11000 mm / 13000 mm    |
| HORIZONTAL OUTREACH       | : 4500 mm                |
| SWING                     | : 360° CONTINUOUS        |
| WEIGHT ( approx.)         | : 2500 kgs               |

2



## AERIAL ACCESS PLATFORM - SELF PROPELLED / ARTICULATED BOOM



3

|                           |                         |
|---------------------------|-------------------------|
| TYPE ( ARTICULATED BOOM ) | : VXAPF -230 / 16000 SP |
| CAPACITY                  | : 230 kgs               |
| MAXIMUM WORKING HEIGHT    | : 16000 mm              |
| CLOSED HEIGHT             | : 2330 mm               |
| MAXIMUM LIFT HEIGHT       | : 14000 mm              |
| HORIZONTAL OUTREACH       | : 7470 mm               |
| SWING                     | : 360° CONTINUOUS       |
| WEIGHT ( approx.)         | : 7500 kgs              |



## AERIAL ACCESS PLATFORM - SELF PROPELLED / TELESCOPIC BOOM



|                          |                            |
|--------------------------|----------------------------|
| TYPE ( TELESCOPIC BOOM ) | : VXAPF -230 /14000 SPDODI |
| CAPACITY                 | : 230 kgs                  |
| MAXIMUM WORKING HEIGHT   | : 14000 mm                 |
| CLOSED HEIGHT            | : 2550 mm                  |
| MAXIMUM LIFT HEIGHT      | : 12000 mm                 |
| HORIZONTAL OUTREACH      | : 9650 mm                  |
| SWING                    | : 360° CONTINUOUS          |
| WEIGHT ( approx.)        | : 6500 kgs                 |

4

available upto 40 mtr

## AERIAL ACCESS PLATFORM - SELF PROPELLED / CRAWLER TYPE



5

available upto 40 mtr

|                               |                            |
|-------------------------------|----------------------------|
| TYPE ( ARTICULATED BOOM )     | : VXAPF -200/15000 NA DUAP |
| CAPACITY                      | : 200 kgs                  |
| MAXIMUM WORKING HEIGHT        | : 15000 mm                 |
| MAXIMUM LIFT HEIGHT           | : 13000 mm                 |
| HORIZONTAL OUTREACH           | : 7000 mm                  |
| SWING                         | : 360° CONTINUOUS          |
| TOTAL DIMENSION ( L x W x H ) | : 5160 x 900 x 2100 mm     |
| WEIGHT ( approx.)             | : 1900 kgs                 |

## AERIAL ACCESS PLATFORM - TRUCK MOUNTED

|                           |                          |
|---------------------------|--------------------------|
| TYPE ( ARTICULATED BOOM ) | : VXAPF - 300 / 23500 TM |
| CAPACITY                  | : 300 kgs                |
| MAXIMUM WORKING HEIGHT    | : 23500 mm               |
| MAXIMUM OUTREACH          | : 11000 mm               |
| PLATFORM SIZE             | : 1200 x 900 x 1200 mm   |
| ROTATION                  | : 360° CONTINUOUS        |
| POWER SOURCE              | : FROM P T O             |
| RECOMMENDED VEHICLE       | : EICHER JUMBO 20.16     |

6



also available SPECIAL VARIANT

Such as :  
VXAPF-220/11000 TM  
(on TATA-407 or equivalent)  
and others -  
made to order



# VANJAX AERIAL ACCESS PLATFORM



7

## AERIAL ACCESS PLATFORM - TRACTOR MOUNTED

|                                  |                                  |
|----------------------------------|----------------------------------|
| <b>TYPE ( ARTICULATED BOOM )</b> | <b>: VXAPF - 200 / 16000 TRM</b> |
| LIFTING CAPACITY                 | : 200 kgs                        |
| MAXIMUM PLATFORM HEIGHT          | : 15000 mm                       |
| MAXIMUM WORKING HEIGHT           | : 16000 mm                       |
| MAXIMUM OUTREACH                 | : 6000 mm                        |
| ROTATION                         | : 360° CONTINUOUS                |
| BASKET SIZE                      | : 1000 x 700 x 1000 mm           |
| STABILIZER (as may be required)  | : 4 Nos or 2 Nos                 |



8

## AERIAL ACCESS PLATFORM - FORKLIFT ATTACHMENT

|                               |                      |
|-------------------------------|----------------------|
| <b>TYPE (TELESCOPIC BOOM)</b> | <b>: VXFLA - APF</b> |
| CAPACITY                      | : 250 kgs            |
| MAXIMUM PLATFORM HEIGHT       | : 7500 mm            |
| MAXIMUM WORKING HEIGHT        | : 9000 mm            |
| MAXIMUM OUTREACH              | : 5900 mm            |
| BASKET SIZE                   | : 1000 x 900 mm      |
| MINIMUM FORKLIFT CAPACITY     | : 2 ton. And above   |
| WEIGHT (approx)               | : 850 kgs            |



9

available  
VXAWP-SM  
125 / 12000

## AERIAL WORK PLATFORM - SINGLE MAST

|                 |   |
|-----------------|---|
| <b>TYPE</b>     | <b>: VXAWP-SM150/8000 : VXAWP-SM125/10000</b> |
| RATED CAPACITY  | : 150 kgs : 125 kgs                           |
| CLOSED HEIGHT   | : 1980 mm : 1980 mm                           |
| RAISED HEIGHT   | : 6000 mm : 8000 mm                           |
| WORKING HEIGHT  | : 8000 mm : 10000 mm                          |
| PLATFORM SIZE   | : 680 x 650 mm : 680 x 650 mm                 |
| POWER SOURCE    | : AC 220-240v/ DC12v: AC 220-240v / DC 12v    |
| WEIGHT (approx) | : AC 310 / DC 350 kgs : AC 330 / DC 370 kgs   |

## AERIAL WORK PLATFORM - DUAL MAST

|                 |   |
|-----------------|---|
| <b>TYPE</b>     | <b>: VXAWP-DM300/8000 : VXAWP-DM300/10000</b> |
| RATED CAPACITY  | : 300 kgs : 300 kgs                           |
| CLOSED HEIGHT   | : 1905 mm : 1905 mm                           |
| RAISED HEIGHT   | : 6000 mm : 8000 mm                           |
| WORKING HEIGHT  | : 8000 mm : 10000 mm                          |
| PLATFORM SIZE   | : 1450 x 600 mm : 1450 x 600 mm               |
| POWER SOURCE    | : AC 220-240v/ DC12v: AC 220-240v / DC 12v    |
| WEIGHT (approx) | : AC 500 / DC 540 kgs : AC 570 / DC 610 kgs   |

10

available  
VXAWP-DM 250/12000  
VXAWP-DM 200/14000  
VXAWP-DM 200/16000



## AERIAL WORK PLATFORM - DUAL MAST / SELF PROPELLED

|                                 |                                 |
|---------------------------------|---------------------------------|
| <b>TYPE</b>                     | <b>: VXAWP - DM SP 200/7500</b> |
| CAPACITY                        | : 200 kgs                       |
| MAX. PLATFORM HEIGHT            | : 7500 mm                       |
| MAX. MACHINE HEIGHT             | : 9000 mm                       |
| PLATFORM SIZE                   | : 1000 x 700 x 1150 mm          |
| ANEROID BATTERY                 | : 2 x 12 V / 120                |
| OVERALL DIMENSION ( L x W x H ) | : 1500 x 1000 x 1980 mm         |
| WEIGHT (approx)                 | : 1100 mm                       |

11

available  
VXAWP-DM SP  
150 / 9000



## AWP - STACKER LIFT - SINGLE COLUMN / DOUBLE COLUMN

|  |                            |
|--|----------------------------|
| <b>TYPE ( Fixed Type, Wall Supported )</b> | <b>: VXHS - 500 / 3000</b> |
| CAPACITY                                   | : 500 kgs                  |
| CLOSED HEIGHT                              | : 200 mm                   |
| MAXIMUM PLATFORM HEIGHT                    | : 3000 ~ 4500 mm           |
| MAXIMUM MACHINE HEIGHT                     | : --- mm                   |
| PLATFORM SIZE                              | : 1500 x 1000 mm           |
| POWER PACK                                 | : 5 hp / 415 v             |
| WEIGHT (approx)                            | : ---kgs                   |


12



# VANJAX HYDRAULIC SCISSOR LIFT



## MOBI LIFT

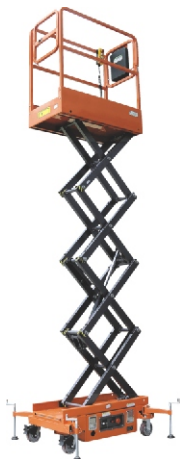

13

|                               |                        |
|-------------------------------|------------------------|
| <b>TYPE</b>                   | : VXHML - 240 / 5000 M |
| <b>CAPACITY</b>               | : 240 kgs              |
| <b>CLOSED HEIGHT</b>          | : 1630 mm              |
| <b>PLATFORM FLOOR HEIGHT</b>  | : 3000 mm              |
| <b>MAXIMUM WORKING HEIGHT</b> | : 5000 mm              |
| <b>PLATFORM SIZE</b>          | : 1140 x 600 mm        |
| <b>BATTERY</b>                | : 12 v / 95 ah         |
| <b>WEIGHT (approx.)</b>       | : 288 kgs              |

## SCISSOR LIFT - TOWABLE

|                            |                                  |
|----------------------------|----------------------------------|
| <b>TYPE</b>                | : VXLTM-300 / 8000 -11000 -13000 |
| <b>CAPACITY</b>            | : 300 kgs                        |
| <b>CLOSED HEIGHT</b>       | : 1335 mm                        |
| <b>MAX. LIFTED HEIGHT</b>  | : 6000 mm / 9000 mm / 11000 mm   |
| <b>MAX. WORKING HEIGHT</b> | : 8000 mm / 11000 mm / 13000 mm  |
| <b>PLATFORM SIZE</b>       | : 2200 x 1000 mm                 |
| <b>MOTOR CAPACITY</b>      | : 2.2 kw / AC 415v               |
| <b>WEIGHT (approx.)</b>    | : 1700 kgs / 2200 kgs / 2300 kgs |



14

available  
VXLTM-500/6000  
VXLTM-500/9000  
VXLTM-500/11000

## SCISSOR LIFT - PIT MOUNTED / FLOOR MOUNTED



15

|                              |                        |
|------------------------------|------------------------|
| <b>TYPE</b>                  | : VXLTM - 3000 / 11000 |
| <b>CAPACITY</b>              | : 3000 kgs             |
| <b>CLOSED HEIGHT</b>         | : 1800 mm              |
| <b>MAXIMUM LIFTED HEIGHT</b> | : 11000 mm             |
| <b>PLATFORM SIZE</b>         | : 6000 x 1200 mm       |
| <b>HYDRAULIC LIFT</b>        | : 9200 mm              |
| <b>MOTOR CAPACITY</b>        | : 15 hp                |
| <b>WEIGHT ( approx.)</b>     | : — kgs                |

## SCISSOR LIFT - TRACTION TYPE

|                            |                                       |
|----------------------------|---------------------------------------|
| <b>TYPE</b>                | : VXLTM-300 / 8000 -11000 -13000 BOTR |
| <b>CAPACITY</b>            | : 300 kgs                             |
| <b>CLOSED HEIGHT</b>       | : 1335 mm                             |
| <b>MAX. LIFTED HEIGHT</b>  | : 6000 mm / 9000 mm / 11000 mm        |
| <b>MAX. WORKING HEIGHT</b> | : 8000 mm / 11000 mm / 13000 mm       |
| <b>PLATFORM SIZE</b>       | : 2200 x 1000 mm                      |
| <b>BATTERY</b>             | : 2 x 12 v / 150 ah                   |
| <b>WEIGHT (approx.)</b>    | : 1700 kgs / 2200 kgs / 2300 kgs      |



16

available  
VXLTM-500/8000  
VXLTM-500/11000  
VXLTM-500/13000

## SCISSOR LIFT - ROUGH TERRAIN



17

available  
VXLTM -  
600/16000 DO-RT

|                                |                            |
|--------------------------------|----------------------------|
| <b>TYPE</b>                    | : VXLTM -600 / 10000 BO-RT |
| <b>CAPACITY</b>                | : 600 kgs                  |
| <b>CLOSED HEIGHT</b>           | : 2760 mm                  |
| <b>PLATFORM FLOOR HEIGHT</b>   | : 10000 mm                 |
| <b>MAXIMUM WORKING HEIGHT</b>  | : 12000 mm                 |
| <b>PLATFORM SIZE</b>           | : 3980 x 1830 mm           |
| <b>PLATFORM EXTENSION SIZE</b> | : 6570 x 1830 mm           |
| <b>WEIGHT (approx.)</b>        | : 7300 kgs                 |

## SCISSOR LIFT - SELF PROPELLED

|                                |                            |
|--------------------------------|----------------------------|
| <b>TYPE</b>                    | : VXLTM - 350 / 14000 BOSP |
| <b>CAPACITY</b>                | : 350 kgs                  |
| <b>CLOSED HEIGHT</b>           | : 2500 mm                  |
| <b>MAXIMUM WORKING HEIGHT</b>  | : 14000 mm                 |
| <b>PLATFORM SIZE</b>           | : 2300 x 1150 x 1100 mm    |
| <b>PLATFORM EXTENSION SIZE</b> | : 1000 mm                  |
| <b>BATTERY</b>                 | : 4 x 6 v / 225 ah         |
| <b>WEIGHT (approx.)</b>        | : 3081 kgs                 |

18

available  
VXLTM-350/12000 BOSP  
VXLTM-450/10000 BOSP  
VXLTM-500/8000 BOSP



6mtr. & 8mtr.  
Narrow width  
available

## SCISSOR LIFT - TRUCK MOUNTED



19

|  |                      |
|--|----------------------|
| <b>TYPE</b>                                    | : VXLTM-2000 / 12000 |
| <b>CAPACITY</b>                                | : 2000 kgs           |
| <b>PLATFORM SIZE ( WIDE )</b>                  | : 2000 mm            |
| <b>PLATFORM SIZE ( LONG )</b>                  | : 4600 mm            |
| <b>MAXIMUM RAISED HEIGHT</b>                   | : 12000 mm           |
| <b>COLLAPSIBLE Ht. from Ground Level</b>       | : 2100 mm            |
| <b>MIN. HT. from Ground Level to Hand Rail</b> | : 3000 mm            |

Also available Different Capacity & Heights.