



VANJAX UNIT -1 (VXC-1)

VANJAX

HYDRAULIC TOOLS



VANJAX FACTORY UNIT -2 (VXC-2)

HYD. PIPE BENDERS - HYD. PULLERS - HYD. REMOTE CONTROL JACKS

VANJAX SALES PVT. LTD.,
ISO 9001:2015
CERTIFIED COMPANY

www.vanjax.in



HYDRAULIC POWER IN ACTION ★ YOU NEED IT, VANJAX MAKES IT.



HYDRAULIC PIPE BENDER - HAND OPERATED - TRIPOD MODEL

TYPE	VXHPB - T 9	VXHPB - T 21
CAPACITY	9 Ton.	21 Ton.
MAXIMUM STROKE	250 mm.	370 mm.
CRIMP RANGE (mm.)	Ø 21.3 - Ø 60 mm.	Ø 21.3 - Ø 108 mm.
BENDING FORMERS (inch)	½" ¾" 1" 1¼" 1½" 2"	½" ¾" 1" 1¼" 1½" 2" 2½" 3" 4"
WALL THICKNESS OF PIPE	2.75 mm. - 4.5 mm.	2.75 mm. - 6 mm.
VOLUME (cm.)	73 x 32 x 21	118 x 46 x 23
WEIGHT (approx.)	53 kgs.	200 kgs.

HYDRAULIC INTEGRAL PULLERS

TYPE	OUTPUT	MAX. STROKE	MAX. SPREAD	VOLUME (cm.)	WEIGHT (approx.)
VXHPL-5	5 Ton	50 mm	200 mm	73x18x18	7.5 kg.
VXHPL-10	10 Ton	50 mm	250 mm	73x18x18	11 kg.
VXHPL-20	20 Ton	60 mm	350 mm	73x21x18	19 kg.
VXHPL-30	30 Ton	60 mm	400 mm	73x25x18	25 kg.
VXHPL-50	50 Ton	60 mm	500 mm	73x25x18	43 kg.



HYDRAULIC REMOTE CONTROL GEAR PULLERS



TYPE	OUTPUT	MAX. STROKE	MAX. SPREAD	VOLUME (cm.)	WEIGHT (approx.)
VXHGP-HP-5/50	5 Ton	50 mm	50-200 mm	73x18x18	15 kg.
VXHGP-HP-10/50	10 Ton	50 mm	50-250 mm	73x18x18	20 kg.
VXHGP-HP-20/60	20 Ton	60 mm	100-350 mm	73x21x18	27 kg.
VXHGP-HP-30/60	30 Ton	60 mm	150-400 mm	73x25x18	35 kg.
VXHGP-HP-50/60	50 Ton	60 mm	200-500 mm	73x25x18	55 kg.

*along with suitable pump & 2 mtr. hose.

HYDRAULIC LOW LIFT JACKS

TYPE	CAPACITY (Ton)	STROKE (mm.)	CLOSED HEIGHT	OIL CAPACITY	L x W (mm.)	WEIGHT (approx.)
VXRC - LL -10 / 10	10	10	48 mm.	16 cc.	83 x 60	1.6 kgs.
VXRC - LL -20 / 11	20	11	56 mm.	34 cc.	99 x 76	2.7 kgs.
VXRC - LL -30 / 13	30	13	62 mm.	55 cc.	123 x 98	4.6 kgs.
VXRC - LL -50 / 16	50	16	72 mm.	101 cc.	148 x 120	7.8 kgs.
VXRC - LL -100 / 16	100	16	91 mm.	200 cc.	188 x 160	16.8 kgs.



HYDRAULIC REMOTE CONTROL JACKS



TYPE	CAPACITY (Ton)	STROKE (mm.)	CLOSED HEIGHT	OIL CAPACITY	WEIGHT (approx.)
VXRC - 10 / 100	10	100	172 mm.	169 cc.	4.4 kgs.
VXRC - 10 / 150	10	150	222 mm.	254 cc.	5.7 kgs.
VXRC - 20 / 100	20	100	176 mm.	311 cc.	5.3 kgs.
VXRC - 20 / 150	20	150	226 mm.	465 cc.	6.6 kgs.
VXRC - 30 / 100	30	100	187 mm.	471 cc.	10.7 kgs.
VXRC - 30 / 150	30	150	237 mm.	705 cc.	13.5 kgs.
VXRC - 50 / 100	50	100	197 mm.	768 cc.	14.9 kgs.
VXRC - 50 / 150	50	150	247 mm.	1147 cc.	18 kgs.
VXRC - 100 / 100	100	100	232 mm.	1530 cc.	30.6 kgs.
VXRC - 100 / 150	100	150	282 mm.	2281 cc.	35.5 kgs.
VXRC - 200 / 100	200	100	252 mm.	2953 cc.	71 kgs.
VXRC - 200 / 150	200	150	302 mm.	4406 cc.	83 kgs.



HYDRAULIC REMOTE CONTROL - LIGHT WEIGHT (ALUMINIUM) CYLINDERS

TYPE	CAPACITY (Ton)	STROKE (mm.)	CLOSED HEIGHT	WEIGHT (approx.)
VXRC- LW- 10 / 150	10	150	242 mm.	2.1 kgs.
VXRC- LW- 20 / 150	20	150	262 mm.	4.6 kgs.
VXRC- LW- 30 / 150	30	150	272 mm.	7.6 kgs.
VXRC- LW- 50 / 150	50	150	282 mm.	12.5 kgs.
VXRC- LW- 100 / 150	100	150	308 mm.	23.3 kgs.

VANJAX ACCESSORIES



VXHP- 1

HYDRAULIC HAND PUMP - SINGLE PLUNGER

TYPE	WORKING PRESSURE	PLUNGER DIA H.P.	DISCHARGE / STROKE H.P.	OIL TANK CAPACITY
VXHP - 1	1000 Bar	Ø10.0 mm.	3.5 cc	3.5 ltr




VXHP- 2

HYDRAULIC HAND PUMP - DOUBLE PLUNGER

TYPE	WORKING PRESSURE	PLUNGER DIA H.P. / L.P.	DISCHARGE / STROKE H.P. / L.P.	OIL TANK CAPACITY
VXHP - 2	800 Bar	Ø12.7 / Ø25.4 mm.	3.2 cc / 12.8 cc	3.5 / 7.5 / 11 ltr

With suction strainer (optional).

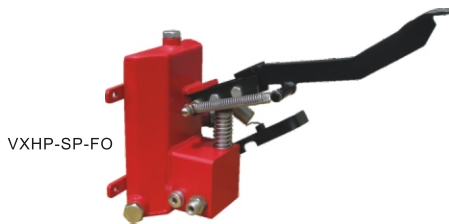

VXHP-SP-FO

HYDRAULIC FOOT PUMP - SINGLE PLUNGER

TYPE	WORKING PRESSURE	PLUNGER DIA H.P.	DISCHARGE / STROKE H.P.	OIL TANK CAPACITY
VXHP-SP-FO	1000 Bar	Ø10.0 mm.	3.5 cc	3.5 ltr



VXQC-700

QUICK COUPLER

TYPE	CAP. kg/cm ²	SIZE
VXQC-700	700	¼", 3/8"
VXQC-1000	1000	½", ¾", 1"

VXSOV-700



SHUT-OFF/FLOW CONTROL VALVE

TYPE	CAPACITY kg/cm ²
VXSOV-700	700



VXPG

PRESSURE GAUGE

TYPE	CAPACITY kg/cm ²	DIAL mm
VXPG-106	0 - 600	100
VXPG-1000	0 - 1000	100

HYD. HIGH PRESSURE THERMO PLASTIC HOSE FEMALE SWIVEL - END-M18 x 1.5 p.



HYHE-1

HYDRAULIC HOSE


TYPE	LENGTH	WORKING PRESSURE / DIA
HYHE-1	1 mtr. upto 5 mtr.	700 bar (10000 psi) / Ø 1/4"



VANJAX
ISO 9001:2015 COMPANY
INDUSTRIAL HYDRAULICS-TOOLS-EQUIPMENT-DEVICES-MACHINES



VANJAX HYDRAULIC SCISSOR LIFTS

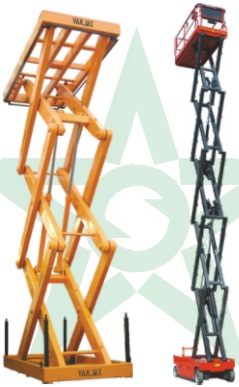

HYDRAULIC MULTI SCISSOR PLATFORM - STATIONARY (FOR UNDER GROUND CAR PARKING) SELF PROPELLED SCISSOR LIFT
Reach Ht. - 7.5 mts to 16 mts.



HYDRAULIC XR PLATFORM
Cap. - 2 ton



HYDRAULIC XR PLATFORM
Cap. - 2.5 ton to 40 ton



SCISSOR PLATFORM-SELF PROPELLED
Cap. - 227 kgs



MULTI SCISSOR PLATFORM-1M
Cap. - 500 kgs to 2 ton

HYDRAULIC POWER IN ACTION ☆ YOU NEED IT, VANJAX MAKES IT.
Technical details and features, will be provided on request.



VANJAX
ISO 9001:2015 COMPANY
INDUSTRIAL HYDRAULICS-TOOLS-EQUIPMENT-DEVICES-MACHINES



VANJAX HYDRAULIC AERIAL ACCESS PLATFORMS




SELF PROPELLED AERIAL ACCESS PLATFORM
Reach Ht. - 13 mts.



TRUCK MOUNTED
Reach Ht. - 13 mts.



SELF PROPELLED (SPV)
Reach Ht. - 13 mts.

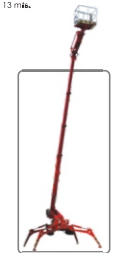

SELF PROPELLED APF - CRAWLER TYPE
Reach Ht. - 7 mts. To 23 mts.



TRUCK MOUNTED
Reach Ht. - 23 mts.

HYDRAULIC POWER IN ACTION ☆ YOU NEED IT, VANJAX MAKES IT.
Technical details and features, will be provided on request.



VANJAX
ISO 9001:2015 COMPANY
INDUSTRIAL HYDRAULICS-TOOLS-EQUIPMENT-DEVICES-MACHINES



AERIAL WORK PLATFORM

(VXAWP) SINGLE / DUAL MAST
Capacity: 125 kg. Max. Height: 10 mtr



HYDRAULIC POWER IN ACTION ☆ YOU NEED IT, VANJAX MAKES IT.
Technical details and features, will be provided on request.



Khvraji - MARUTHI, CHENNAI



ISO 9001:2015 COMPANY



DI MEHTA'S HOSPITAL, CHENNAI



INTELLIGENT CAR PARKING SOLUTIONS


FREEDOM FROM ALL TENSIONS TO PARK YOUR SECOND CAR.
CAR-PARK PROBLEM & PERFECT SOLUTION
SIMPLE TO INSTALL, NO FOUNDATION,
START USING THE MOMENT YOU HAVE IT INSTALLED



MADE IN INDIA



A.B.T. CHENNAI



AVENUE NISSAN, CHENNAI

HYDRAULIC POWER IN ACTION ☆ YOU NEED IT, VANJAX MAKES IT.
Technical details and features, will be provided on request.

VANJAX SALES PVT. LTD.,
an ISO 9001:2015 COMPANY
Phone:044-4282 1000, 2625 5300
Fax: 0091-44-4598 5700
e-Mail : info@vanjax.com / jfk@vanjax.com

Regd. Off. Unit-1 (VXC-1)
343, Sidco Industrial Estate
Ambattur
Chennai 600098.T.N., India

Vanjax Factory Unit-2 (VXC-2)
S.No.230/11, Mevalur Kuppam
Sriperumbudur
Chennai 602105. T.N., India

Vanjax Regional Mktg. Off.
A-53, Ground Floor
Okhla Ind. Area, Phase II
New Delhi 110020. India

cgm@vanjax.com / salesndl@vanjax.com / salesblr@vanjax.com
www.vanjax.in / www.carnest.in



HYDRAULIC POWER IN ACTION ☆ YOU NEED IT, VANJAX MAKES IT.



This photo literature is the sole property of VANJAX SALES (P) Ltd, Chennai. Issued for legitimate information purposes in connection with our business only. Entrusted to the recipient in good faith & trust as a confidential document protected by exclusive copyright as an intellectual property with sole proprietary rights vested in VANJAX SALES (P) Ltd, India.

ENTREPRENEUR BANK OF INDIA
OF THE YEAR SPONSORED SURVEY OF
SME - 2012 100 BEST SME - 2012